








# Working Diagram

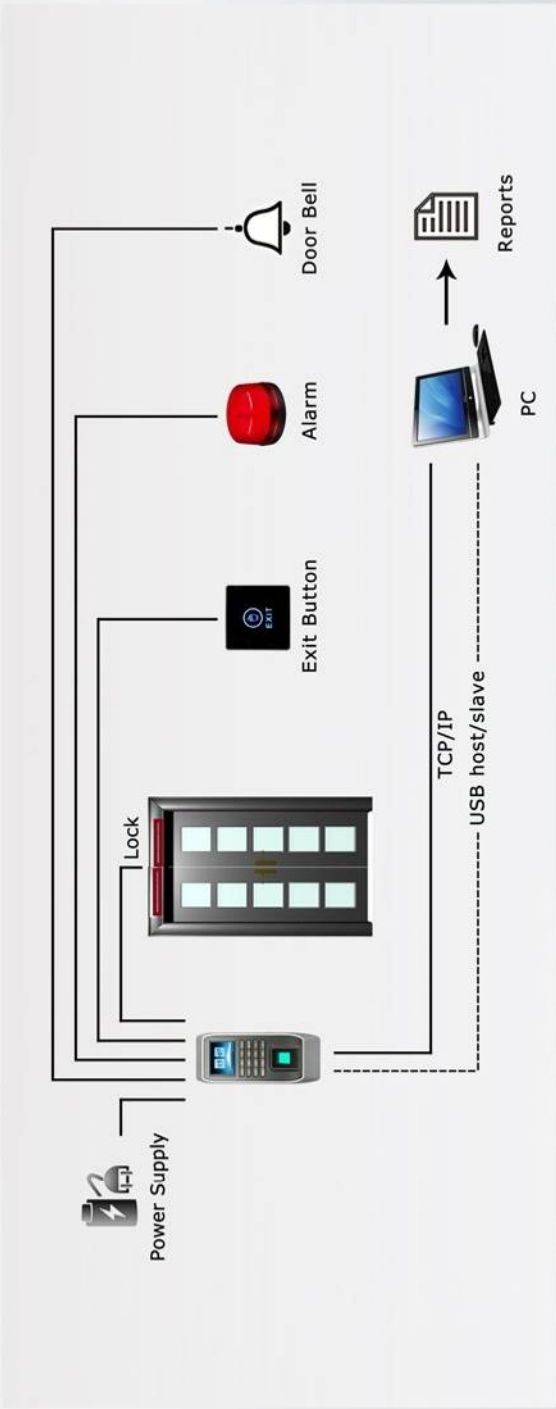

## Specification

<b>Display</b>	<b>Environment</b>
2.4 inch TFT color screen 320x240 pixel	Operating Temp.: 0°C-45°C
<b>CPU</b>	Operating Humidity: ≤90%
240Mhz ARM 9	<b>Operating Mode</b>
<b>Capacity</b>	On line/Off line
Fingerprint: 2,000	<b>Access Control Function</b>
Events: 160,000	Log Inquiry, Multi-verify Mode, 8-PIN ID, Scheduled Bell, 255 Time Zone, Anti-pass Back, External bell
<b>Verification speed</b>	<b>Access Control Interface</b>
1:N <0.5 second	EM lock, Door Sensor, Exit Button, Alarm, Wired Door Bell
<b>Identification</b>	<b>Power Supply</b>
FRR≤0.01% ; FAR≤0.0001%	12V/1A
<b>Language</b>	<b>Weight</b>
English, Spanish, Indonesian (available to customize for others)	0.3KG
<b>Communication</b>	<b>Dimension</b>
TCP/IP (LAN, WAN), USB host, USB slave, Wiegand in/out	195 x 135 x 43 mm
<b>Software</b>	<b>Optional</b>
Time 3.0	Battery, RFID, Mifare

## Package List

	Device		Mounted plate		Data cable		Screws		User manual		Software CD
---	--------	---	---------------	--	------------	---	--------	---	-------------	---	-------------


# Fingerprint Access Control System



UA-16



- 2.4 " TFT color screen 320x240 pixel
- High speed CPU processor 240Mhz ARM 9.0
- High quality spare parts with excellent performance
- Multi-choice for verification
- 255 Time Zones setting for access control
- Cost-effective for small or medium enterprise
- Suit for office, school, factory, organization etc



Fingerprint



Password



Log inquiry



USB  
host/slave



TCP/IP



Anti-pass  
back



Door bell